


Submittal


Split System Heat Pump

5HPL5060A1

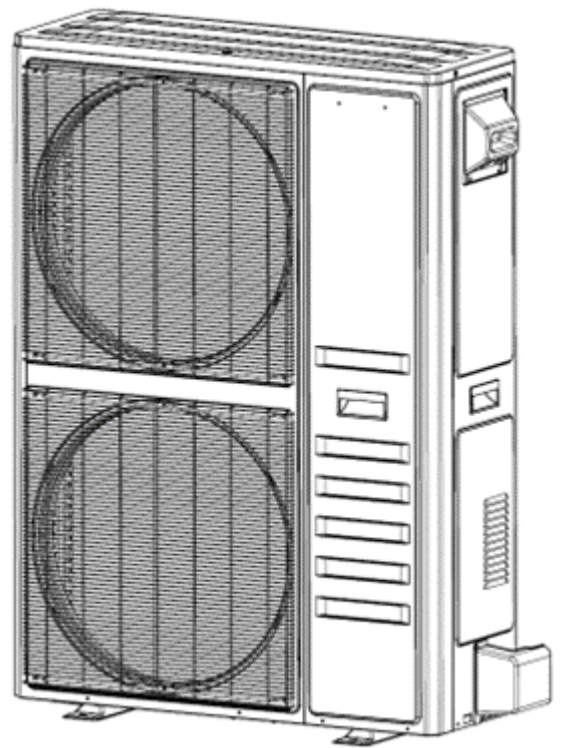

Note: Graphics in this document are for representation only. Actual model may differ in appearance.

Outline Drawing

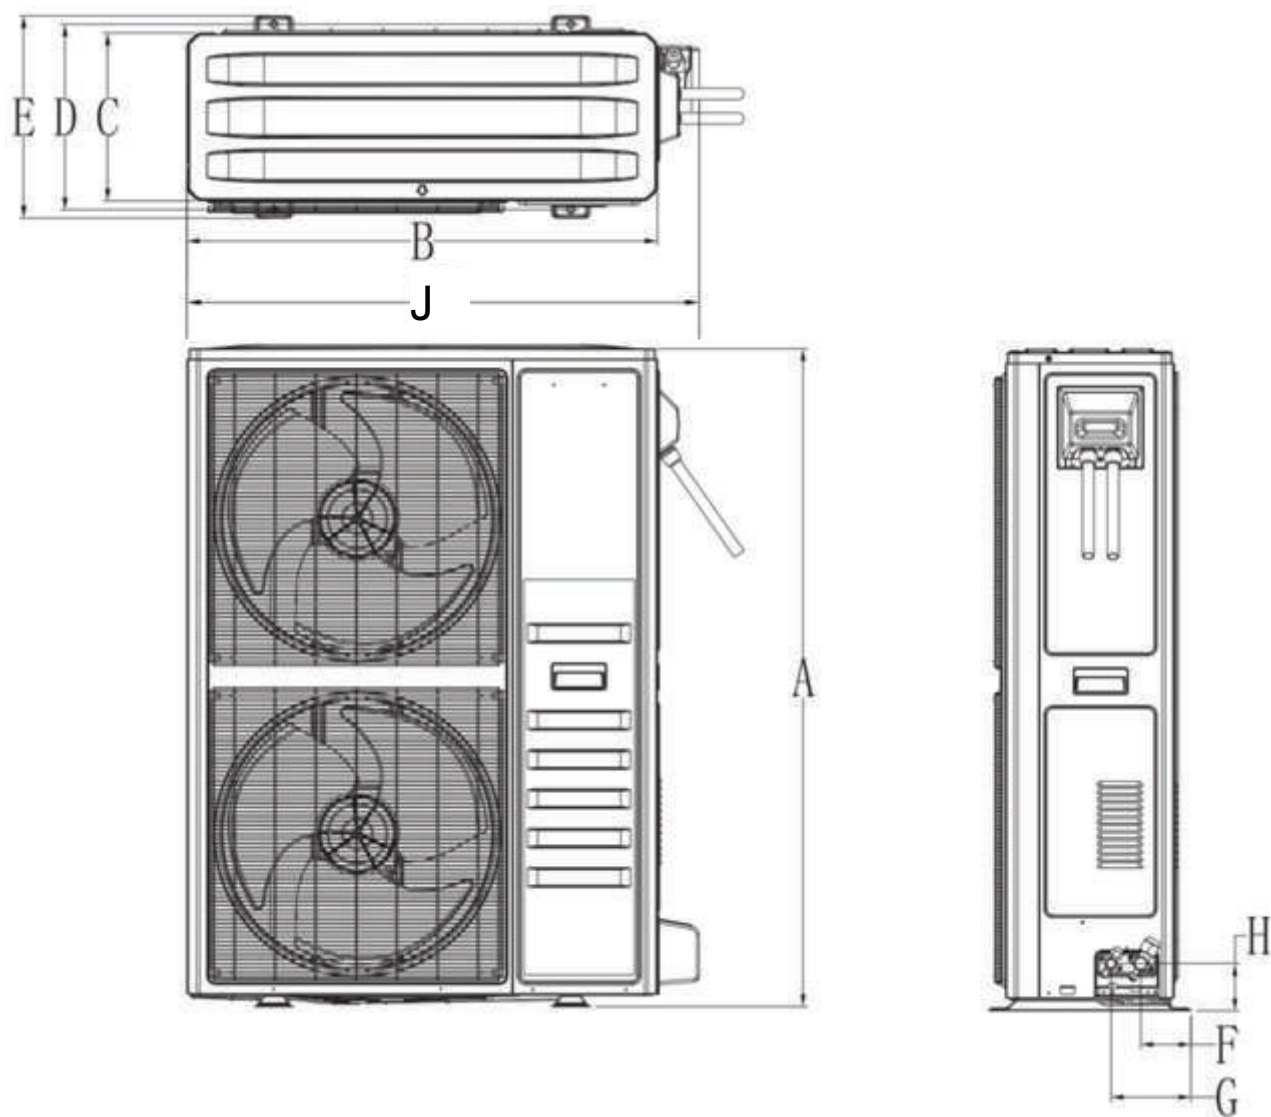

Note: All dimensions are reference dimensions.

Model	A	B	C	D	E	F	G	H	J
5HPL5060A1	52.40	37.40	13.39	14.76	16.10	4.00	6.37	3.75	40.71

Note: All dimensions are in inches.

SOUND POWER LEVEL									
Model	A-Weighted Sound Power Level [dB(A)]	Full Octave Sound Power [dB]							
		63Hz*	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	8000Hz
5HPL5060A1	68	63	61	56	62	60	57	46	39

Notes:

- Rated in accordance with AHRI Standard 270–2015.
- *For reference only.

Product Specifications

OUTDOOR UNIT ^(a)	5HPL5060A1
POWER CONNS. — V/PH/HZ ^(b)	208/230/1/60
MIN. CIR. AMPACITY	35
MAX. OVERCURRENT PROTECTION	55
COMPRESSOR	Rotary
NO. USED — NO. STAGES	1-MULTI
VOLTS/PH/HZ	208/230/1/60
R.L. AMPS ^(c)	16.5
FACTORY INSTALLED	
START COMPONENTS ^(d)	NO
INSULATION/SOUND BLANKET	YES
COMPRESSOR HEAT	YES
OUTDOOR FAN	PROPELLER
DIA. (IN.) — NO. USED	20-7/8-2
TYPE DRIVE — NO. SPEEDS	DIRECT - MULTI
NO. MOTORS — HP	2-1/8
CFM @ 0.0 IN. W.G. ^(e)	4200
MOTOR SPEED R.P.M.	850
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	2*1.45
OUTDOOR COIL — TYPE	PLATE FIN
ROWS — F.P.I.	3-17
FACE AREA (SQ. FT.)	12-9/16

OUTDOOR UNIT ^(a)	5HPL5060A1
TUBE SIZE (IN.)	0.275
REFRIGERANT CONTROL	ELEC. EXPANSION VALVE
REFRIGERANT	
LBS. — R454B (O.D. UNIT) ^(f)	8 LBS, 13.1 OZ
FACTORY SUPPLIED	YES
LINE SIZE — IN. O.D. GAS	7/8
LINE SIZE — IN. O.D. LIQ.	3/8
DIMENSIONS	H x W x D
CRATED (IN.)	57-3/8×42-17/32×16-15/16
UNCRATED (IN.)	52-11/16×40-23/32×16-1/8
WEIGHT	
Shipping	260
Net (Lbs.)	247

^(a) Certified in accordance with the Air-Source Unitary Air-conditioner Equipment certification program, which is based on AHRI standard 210/240.

^(b) Calculated in accordance with Natl. Elec. Codes. Use only HACR circuit breakers or fuses.

^(c) This value shown for compressor RLA on the unit nameplate and on this specification sheet is used to compute minimum branch circuit ampacity and max. fuse size. The value shown is the branch circuit selection current.

^(d) No means no start components.

^(e) Standard Air — Dry Coil — Outdoor

^(f) This value is approximate. For more precise value see unit nameplate.

Mechanical Specification Options

General

The outdoor condensing units are factory charged with the system charge required for the outdoor condensing unit, ten (10) feet of tested connecting line, and the smallest rated indoor evaporative coil match. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with a wide selection of air handlers and furnace coils that are AHRI certified. The unit is certified to UL 60335-2-40. Exterior is designed for outdoor application.

Casing

Unit is painted with a glossy corrosion resistant finish on all panels. Unit casing is constructed of heavy gauge, galvanized steel and painted with a weather-resistant powder paint finish. All panels are subjected to our 1000 hours salt spray test.

Refrigerant Controls

Refrigeration system controls include condenser fan, compressor drive and low and high pressure switches.

Compressor

The compressor features external over temperature and pressure protection. Other features include: Centrifugal oil pump and low vibration and noise.

Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by grilles and panels.

Low Ambient Cooling

As manufactured, this system has a cooling capacity to 5°F.

About Trane and American Standard Heating and Air Conditioning

Trane and American Standard create comfortable, energy efficient indoor environments for residential applications. For more information, please visit www.trane.com or www.americanstandardair.com.



The AHRI Certified mark indicates company participation in the AHRI Certification program. For verification of individual certified products, go to ahridirectory.org.

The manufacturer has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.

5HPL5060A1-SUB-1B-EN 11 Dec 2024

Supersedes 5HPL5060A1-SUB-1A-EN (November 2024)

©2024